

AT6130A, AT6130D Radiation Monitors

Pocket Radiation Monitor



Compact devices intended for gamma and X-radiation ambient dose equivalent and ambient dose equivalent rate measurement.

AT6130A and AT6130D HAVE TWO VARIANTS:

- w/o PC communication interface
- with Bluetooth interface

Operating principle

Devices operating principle is based on the process of count rate measurement of impulses, generated in Geiger-Muller counter tube under the influence of X and gamma radiation.

Count rate is converted automatically into measurable physical values throughout the range. Energy compensating filter allows correcting energy dependence of sensitivity efficiently in entire energy range of photon radiation.

Microprocessor-based unit is responsible for controlling the radiation monitors operating modes, calculations, storing and displaying measurement results and for self-checking function.

Applications

- Radiation protective measures in case of nuclear disasters
- Civil protection
- Radioecology
- Fire-fighting service
- Customs service
- Dosimetric monitoring in manufacturing facilities, health care and other institutions

Features

- Low weight and small size
- Automatic compensation of intrinsic detector background
- Sound and visual alarm in case threshold level is exceeded for dose and dose rate
- Rapid reaction to statistically significant change of dose rate (measurement process restart)
- Field operation capability over a wide temperature range
- In search mode each registered gamma quantum is indicated by a sound signal
- Up to 2000 measurement results can be stored in non-volatile memory with information about measurement date and time
- Measurement results, current time, date and battery life indicator is displayed on matrix LCD screen
- Measurement results can be transmitted to a PC via Bluetooth interface (If available)
- Headphones can be attached when working in noisy environment
- Bright white backlit LCD-screen
- Display in either Sv/h or in rem/h (configurable per request)



ATOMTEX[®]

INSTRUMENTS AND TECHNOLOGIES FOR NUCLEAR
MEASUREMENTS AND RADIATION MONITORING

AT6130A, AT6130D Radiation Monitors

Specification

Ambient gamma and X radiation dose rate equivalent indication range

AT6130A	0.01 $\mu\text{Sv/h}$...10 mSv/h (or 1 $\mu\text{rem/h}$...1 rem/h)*
AT6130D	0.01 $\mu\text{Sv/h}$...100 mSv/h (or 1 $\mu\text{rem/h}$...10 rem/h)*

Ambient gamma and X radiation dose rate equivalent measurement range

AT6130A	0.1 $\mu\text{Sv/h}$...10 mSv/h (or 10 $\mu\text{rem/h}$...1 rem/h)*
AT6130D	0.1 $\mu\text{Sv/h}$...100 mSv/h (or 10 $\mu\text{rem/h}$...10 rem/h)*

Ambient gamma and X radiation dose equivalent indication range

AT6130A	1 nSv...100 mSv (or 0.1 μrem ...10 rem)*
AT6130D	1 nSv...1 Sv (or 0.1 μrem ...100 rem)*

Ambient gamma and X radiation dose equivalent measurement range

AT6130A	0.1 μSv ...100 mSv (or 10 μrem ...10 rem)*
AT6130D	0.1 μSv ...1 Sv (or 10 μrem ...100 rem)*

Intrinsic relative error of dose rate measurement in the range from 0.1 $\mu\text{Sv/h}$ to 10 mSv/h (10 $\mu\text{rem/h}$...1 rem/h)

$\pm 20\%$ max.

X and gamma radiation energy range

50 keV...3 MeV

Sensitivity to ^{137}Cs gamma radiation

2.8 cps/ $\mu\text{Sv}\cdot\text{h}^{-1}$

Response time for dose rate change from 1 to 10 $\mu\text{Sv/h}$

$\leq 7\text{s}$
(accuracy error $\leq \pm 10\%$)

Energy dependence relative to 662 keV (^{137}Cs)

$\pm 30\%$

Radiation overloading

Radiation monitors can withstand 100-fold rise of dose rate measurement upper range limit for 5 minutes with readings not lower than maximum

Burn-up life

$\geq 100\text{ Sv}$

Continuous run time

$\geq 500\text{ h}$

Working temperature range

AT6130A	-40°C...+55°C (-40°C...-20°C w/o measurement value indication)
AT6130D	-20°C...+55°C

Relative humidity with air temperature $\leq 35^\circ\text{C}$ without condensation

$\leq 95\%$

Drop protection

From $\leq 1.5\text{ m}$ to hard surface

Protection class

IP57

Power supply



2 x AAA-size batteries (LR 03)
or 2 x AAA-size rechargeable cells with nominal voltage 1.2 V

Overall dimensions, weight

110x60x38 mm, 0.25 kg

* Units of measure are chosen during ordering procedure and cannot be altered later

Design and specifications are subject to change without notice

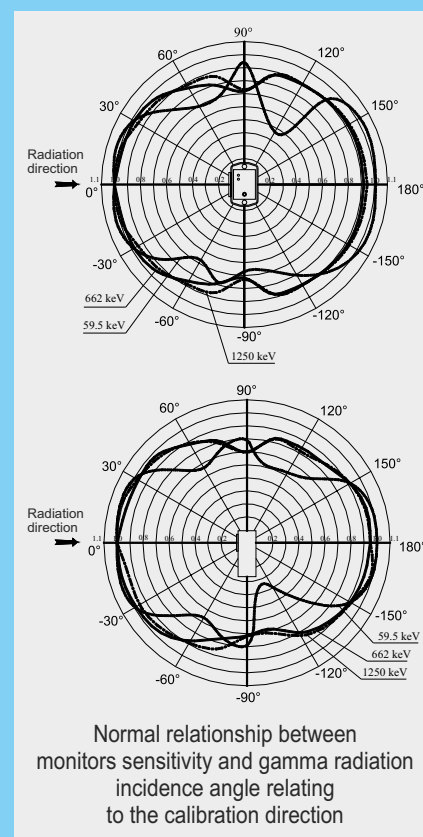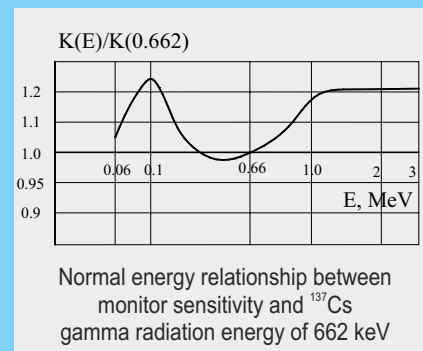

The radiation monitors AT6130A and AT6130D meet International standard requirements:
IEC 60846-1:2009
IEC 60325:2002
Safety standard requirements:
IEC 61010-1:2001
EMC requirements:
EN 55011:2009
IEC 61000-4-2:2001
IEC 61000-4-3:2008

The radiation monitors AT6130A and AT6130D have the pattern approval certificates of Republic of Belarus, Russian Federation, Ukraine, Kazakhstan and Lithuania.



ATOMTEX®

<http://www.atomtex.com>

5, Gikalo st., 220005 Minsk,
Republic of Belarus
Tel./fax: +375 17 2928142
E-mail: info@atomtex.com



Corporate Member
of European
Nuclear
Society